

AREA: PRINCIPAL
EMPRESA EBIR ILUMINACIÓN, S.L.
USUARIO 320-JOAQUÍN AGUILAR HUEZO
FECHA IMPRESIÓN 03/11/2014



TITULO DE INFORME: RE-33014 FICHA TECNICA VENTA EBIR APLIQUES roca

DESCRIPCIÓN INFORME INFORME DE ETIQUETAS DE ARTÍCULOS SIMPLE

FILTROS

Artículo: 25864CI
Tipo: <Todos>
Clase: <Todos>
Grupo: <Todos>
Almacén: 0


ORDENADO POR:

Ordenado por ARTÍCULO (Ascendente)

MODEL: APLIQUE IRENE S-3R CR LED CII IP44 1X12W 800MM C/M

CODE: 25864CI

DIMENSIONS OF PRODUCT:

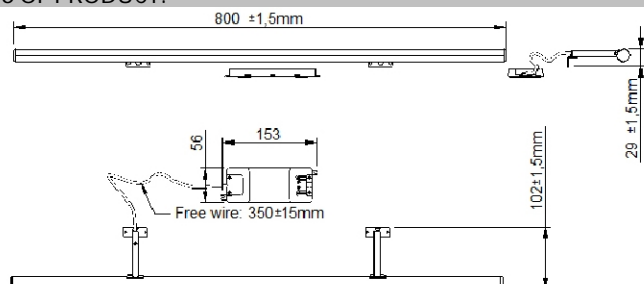

**CRITERIA OF EXTERIOR ASPECT(RE-33033):
QUALITY OF PRODUCT:**

		QUALITY SYMBOLS	
1- Fixing system:			NORMAL
2- Top side:			GOOD
3- Front side:			VERY GOOD
4- Bottom side:			

MATERIALS AND DECORATIONS:

Metal: Aluminium/Zamak Finish: Brigh chrome
PC protector

FIXING TO SURFACE:

Wooden frame

BOXING

INSIDE	UNITS	MEASUREMENT			WEIGHT "kg"	VOLUME "m3"	COMPONENTS
Box	1	0,035	0,12	0,81	0,58	0,003402	1 Applied with power supply wiring 1 Bag with screws 1 Square and accessories bag; 2 Instruction sheet
OUTSIDE							
Lot box	10	0,2 x 0,27 x 0,83			9,10	0,044820	10 Individual boxes by batch
Palet	360	1,95 x 0,83 x 1,2			347	1,942200	10 Individual boxes by batch

MANUFACTURING REQUIREMENTS:

Minimum of production: 1000 Un.
Delivery time: 63 Working days

SPARE

E25895-Power supply 12W AED12-700IIP44; E26055EI-UTE;E24915EI- Multi

ELECTRIC POWER

Nominal voltage	Power	Lamp holder	Lamp	Connexion to network
230V-50Hz	MAX 1X12W	LED		Using driver 12W AED12-700IIP44

STANDARIZATION AND CLASSIFICATION

		IP44			certificate n°
UNE-EN 60598				0,10m	CC_EBIR130901

ILLUMINANCE AND LIGHT SOURCE

Light temp	life bulb	Lux	Direction of
5700K	45000h	1) 1350	
±300K		2) 580	
		3) 225	

ECO DESIGN	
	Ecological impact value
	Low
	0,667